




2MP - IP NETWORK OUTDOOR DOME CAMERA

- G4S-795h / Incl. base tray / IR LED 24pcs (20m)



DIMENSIONS

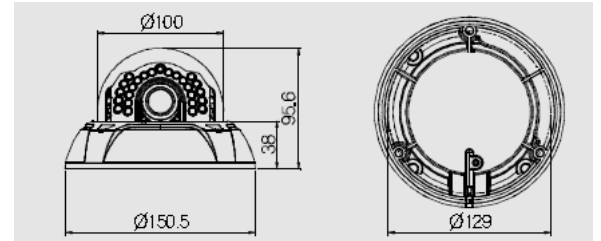

SPECIFICATIONS

MODEL NO.		G4S-795h	
CAMERA	Type	Megapixel Network Day & Night IR Camera	
	Image sensor	1/ 2.8" SONY STARVIS IMX 291 super low light performance progressive-scan CMOS sensor	
	Effective Pixels	1945(H)x1097(approx 2.13Mega pixels)	
	Resolution	1920x1080	
	Min. Illumination	Color: 0.02 Lux/F1.4, B&W: 0.001 Lux /F1.4	
	Lens	Type	Vari-focal Manual Iris / Fixed lens(Optional)
		Focal length / AOV	2.8(W)~12.0(T)mm / (H/V/D) Wide(2.8mm) 96.7/51.8/114 ~ Tele(12mm) 33.9/19/39
	Frame Rate	Max. 25fps	
	Electronic shutter	1/5 to 1/50000	
	Day & Night	Auto/color/B&W(Built-in IR_CUT)	
	Image Setting	Saturation, brightness, contrast, dual-stream can be adjusted by client or IE browser	
	WDR	Digital WDR(Dynamic range: 100dB)	
	DNR	Support	
Defog	Support		
FUNCTION	ROI	Support	
	Compression	H.264 Baseline / H.264 Main profile / H.264 High profile / H.265 Main profile / MJPEG	
	Bit Rate	Main stream: 200Kbps~12Mbps / Sub stream: 100Kbps~6Mbps	
	Network Interface	IPv4/IPv6, RTSP/RTP/RTCP, TCP/UDP, HTTP, DHCP, DNS, FTP, DDNS, PPPoE, SMTP, QOS, 802.1x, Bonjour	
	Motion Detection	Support	
	Overlapped caption	Channel name, date, stream info(adjustable overlapping position)	
	Web Browser	Support up to IE9.0 browser, Chrome, Firefox, Safari	
	Interface protocol	Support ONVIF 2.4 Network Video Standard Protocol	
CVBS	Support		
MECHANICAL	Power Supply	Regulated 12V DC, PoE(Power over Ethernet), IEEE802.3af	
	Power Consumption	Max 6W(IR LED ON)	
	Construction	Aluminum	
	FAN & HEATER	HEATER & FAN:	
	Ingress Protection / IK	IP68 / IK10	
	Dimension / Weight	Ø150.5(W)x95.6(H)mm / Approx. 800g	
	OPERATING TEMP	-45°C~50°C	